



VEHICLE DISASSEMBLY


- (1) Remove the negative battery cable. Fig 1

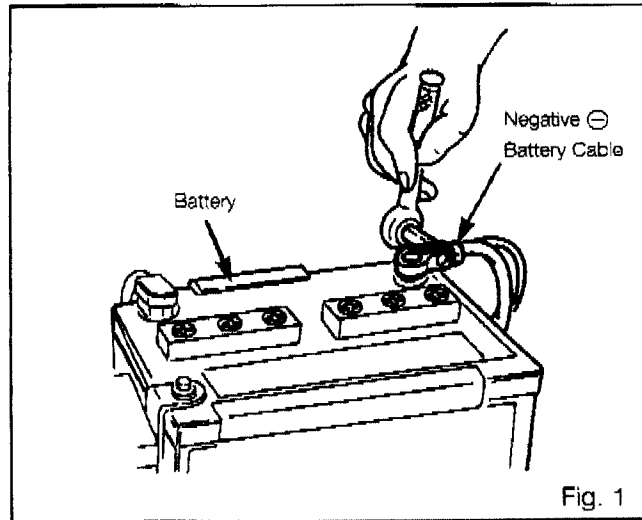

- (2) A) Remove the driver's foot rest. (2 screws)
Fig 2
B) Remove the driver's side step cover. Fig 2
C) Remove the driver's side cowl cover. (1 clip)
Fig 2

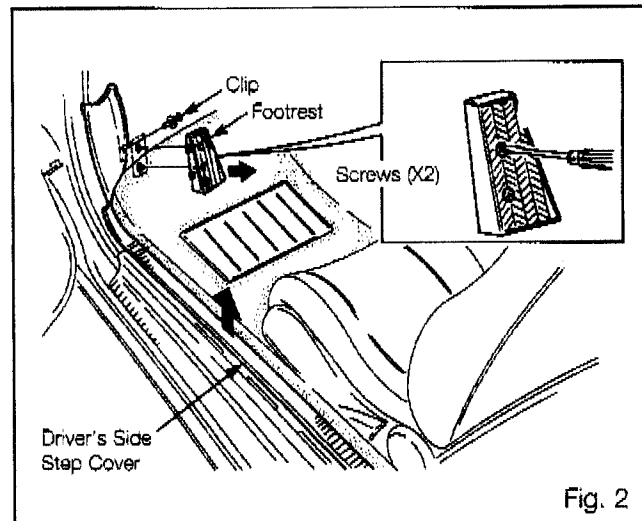

- (3) A) Remove the driver's side under dash cover.
(clips) Fig 3
B) Remove the DIAGNOSIS connector. Fig 3

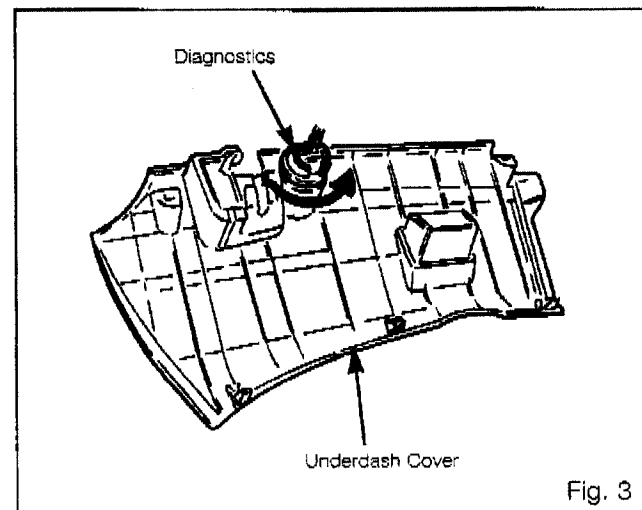

KEYLESS ENTRY SYSTEM
• SUPRA N/TDS •