

## WIRE HARNESS INSTALLATION

- (1) A) Locate and disconnect the vehicle wire harness' orange 9P and 25P connectors from the Door Lock Control/Theft Deterrent System ECU. Fig 15
- B) Unlock the wire harness clip as shown. Fig 15

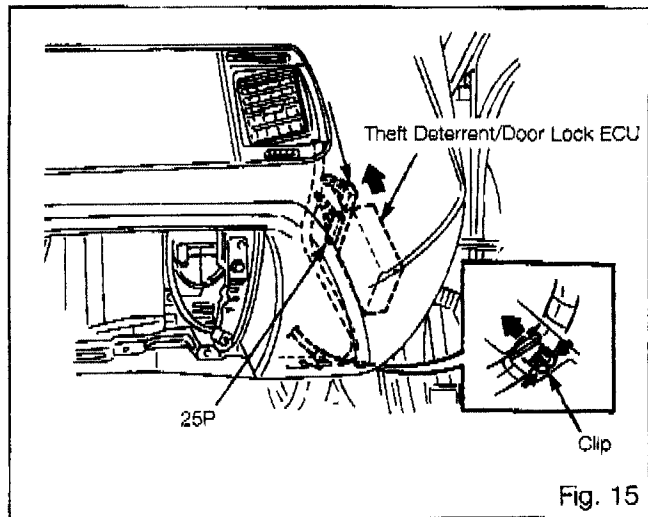


Fig. 15

## WIRE SPLICING CONNECTOR INSTRUCTIONS

- A) Position the open-ended side of a splicing connector over the vehicle's wire harness as shown. (A)
- B) Close the top and bottom halves of the open-ended side of the connector together with pliers, squeezing them together until they lock. (B)
- C) Position the K.E.S. harness' wire onto the closed-end side as shown. (C)
- D) Close the top and bottom halves of the connector together with pliers, squeezing them together until they lock. (D)

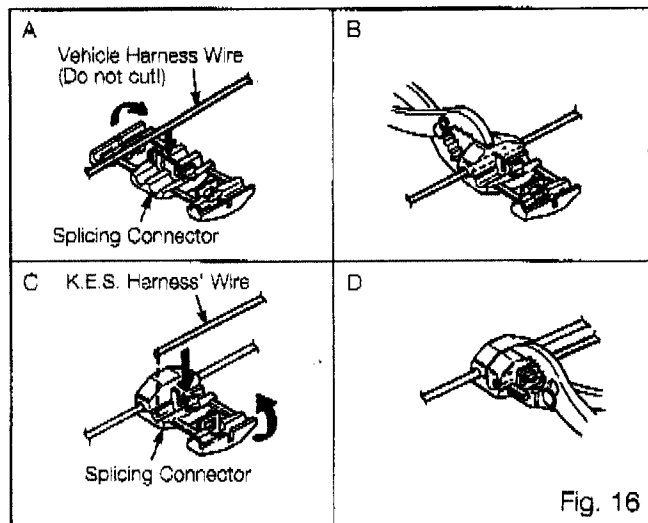


Fig. 16

KEYLESS ENTRY SYSTEM  
• SUPRA W/TDS •

- (2) A) Turn the orange 9P connector so the wires face you, and the tab is on top. Fig 17
- B) Locate the wire in the bottom row, third space from the left. Using a splicing connector, attach the K.E.S. harness' BLACK/RED Ignition Wire. Fig 17

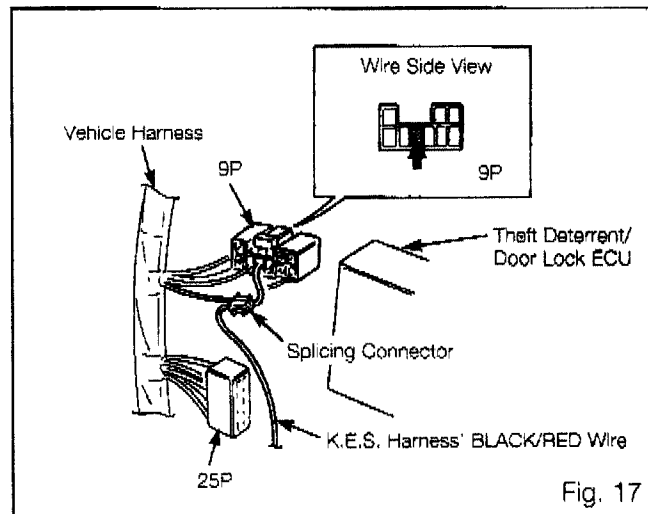


Fig. 17