



- (4) A) Remove the hood release. (2 screws) Fig 4
- B) Remove the driver's side lower dash cover. (2 bolts) Fig 4
- C) Disconnect the OPD2 connector. Fig 4

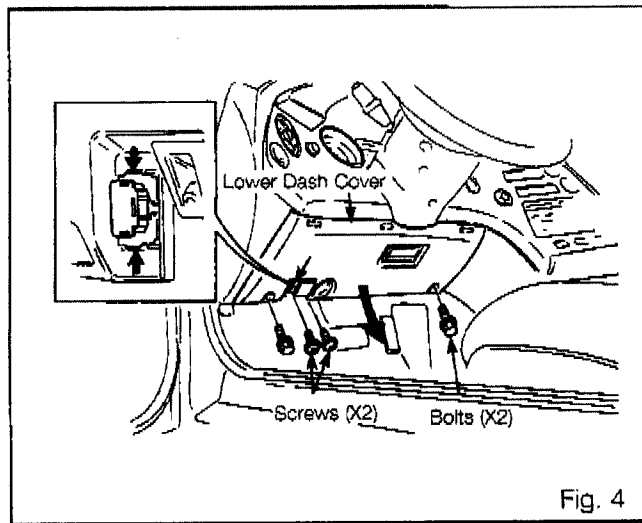

- (5) Remove the metal substructure. (3 bolts) Fig 5

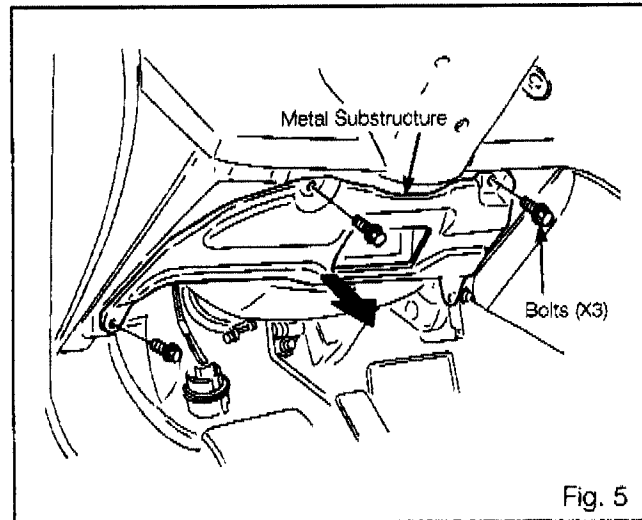

- (6) Remove the driver's side heater duct. (1 clip) Fig 6

