

(13) A) Route the GRAY Antenna wire along the vehicle's wire harness under the dash, past the cowl area, and through the door sill. Fig 29

B) Secure the GRAY Antenna wire with seven medium wire ties as shown. Fig 29

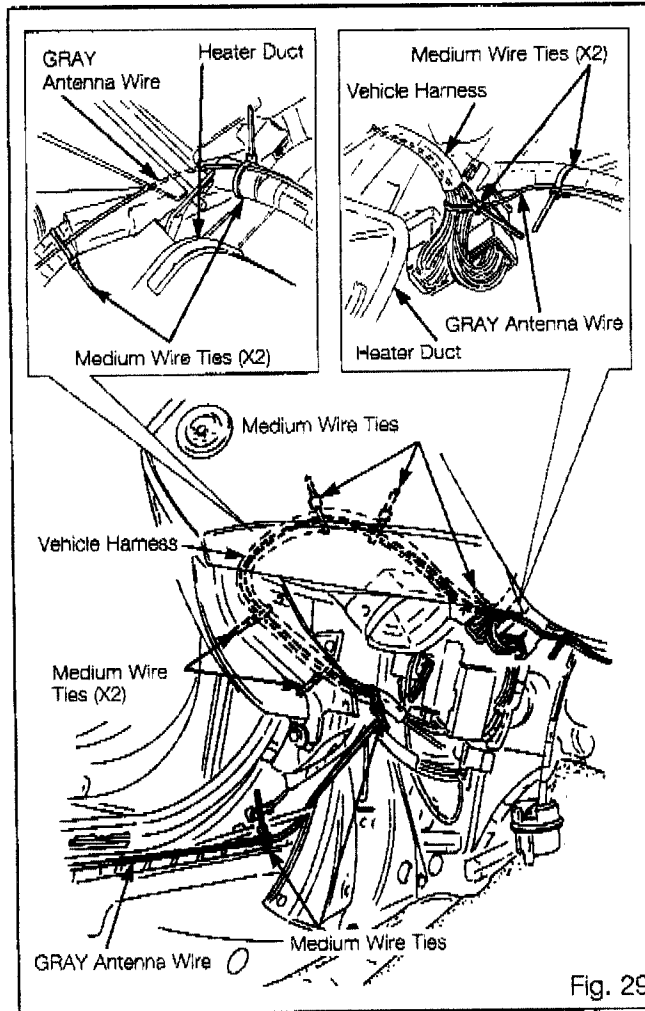


Fig. 29

(14) A) Route the GRAY Antenna wire to the end of the door sill, and secure it to the vehicle's wire harness with a medium wire tie. Fig 30

B) Cut off the excess GRAY Antenna wire as shown. Fig 30

**Note:** Be sure to cut off the excess GRAY Antenna wire. Bundling the excess Antenna wire will adversely affect the remote controls' operating range.

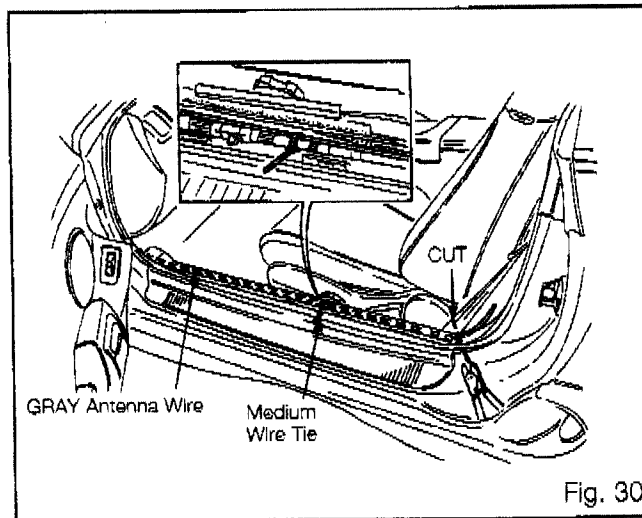


Fig. 30